



# COMBiLiFT

Customised Handling Solutions

## C3000 ST

multi-directional forklift



*three machines in one*

> counterbalance forklift > sideloader > aisle truck


[www.COMBiLiFT.com](http://www.COMBiLiFT.com)



# SPECIFICATIONS

# C3000 ST

DESCRIPTION		STANDARD
1a	Max. Lift Height	4040mm
1b	Free Lift Height	0mm
2	Height Mast Closed	2830mm
3	Max. (Mast raised)	5185mm
4	Overall Length	1950mm
5	Mast Travel	800mm / 1250mm
6	Ground Clearance Under Mast	230mm
7	Ground Clearance to Centre of Wheelbase	130mm
8	Height Over Cab (without work lights)	2660mm
9	Platform Width	3050mm
10	Outside Spread of Fork Arms	1450mm
11	Track Front	2470mm
12	Frame Opening	1500mm
13	Load Centre Distance	300 / 600mm
14	Overhang Front	205mm
15	Wheelbase	1160 / 1610mm
16	Overhang Back	135mm
17	Length From Face of Fork	750mm
18	Approach Angle	45 °
19	Ramp Angle	17°
20	Departure Angle	45°
21	Forward Tilt	3°
22	Backward Tilt	4°
23	Minimum Outside Radius	2120mm / 2420mm
24	Platform Height	495mm
25	Platform Length	750mm / 1200mm
26	Overall Width	3250mm
A	Capacity	3000kg
B	Unladen Weight	5700kg / 6000kg
C	Maximum Ground Speed	10km/h
D	Gradability	10%
E	Kubota V1505- T Diesel	32kW
F	3 ltr GM LPG	48kW
G	Electric	72 Volt/620 Ah
H	Fork Section 50 x 125 x	750mm / 1200mm
I	16 x 7 – 10.5 Front Tyre (Solid Rubber)	OD 406mm / Width 178mm
J	23 x 10 – 12 Rear Tyre (Super Elastic)	OD 580mm / Width 240mm
K	Standard Colour	Green & Grey

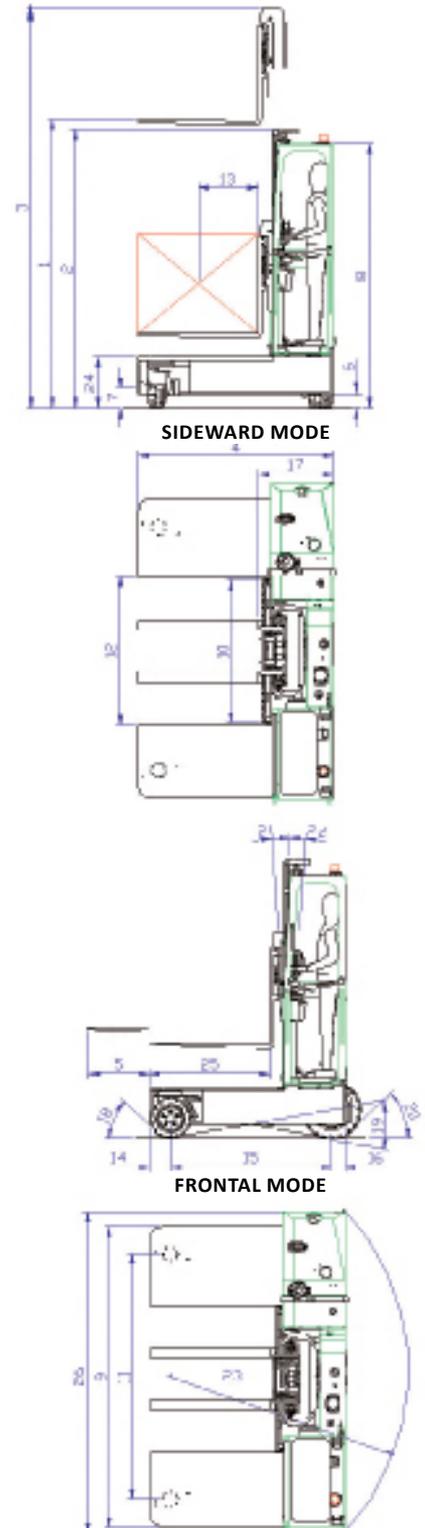

### FEATURES INCLUDE:

- Rubber Mounted Cabin
- Multi-Direction Operation
- Load Sensing Steering
- 2 Wheel Hydrostatic Drive
- 4-way Lever Positioning of Wheels
- Stand up Operator

Distributed by

**COMBiLiFT HQ**

Gallinagh, Co. Monaghan, Ireland

T: +353 47 80500 | F: +353 47 80501

E: info@combilift.com

**www.COMBiLiFT.com**